

MOC

Thermal Transfer Overprinter



Proven Reliability

Engineered with top-tier components and rigorously tested across multiple industries to ensure reliable, fail-safe performance.

Exceptional Range of Material Compatibility

Compatible with a broad selection of ribbons designed for diverse substrates, including those requiring high-temperature resistance and anti-migration properties.

Superior 300DPI Print Quality

Ensures precise, high-resolution codes and visuals through cutting-edge synchronous printing.

Modular Design


Features a user-friendly 7-inch touchscreen and easy ribbon loading for seamless integration.



Parameters

| | | |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------|
| Type | MOC24 | MOC32 |
| Resolution | 200DPI | 300DPI |
| Inter. Print Area | 24 x 55mm | 32 x 55mm |
| Cont. Print Area | 24 x 100mm | 32 x 150mm |
| Ribbon length | 400M | 600M |
| Standard Ribbon width | 25mm | 33mm |
| Print Mode | Intermittent and Continuous Integration | |
| Left and right | Optional | |
| Cont. Print Speed | 50~600mm/s | |
| Max prints | 220packs/min | |
| Print contents | Date, post date, time, counter, shift, Bar code, QR code, LOGO, text | |
| Input | Print signal, Encoder signal (NPN, PNP) | |
| Output | Fault relay output | |
| Dimensions (mm) | 164X158X150 | |
| Printer weight | 5Kg | 5.5Kg |
| Power Supply | 110/220V AC, 50/60 Hz, 120W | |
| Operation Environmental | Temperature: 5~40°C Humidity: 10%~90%, non-condensing | |
| Operating interface | Includes mobile and Windows editing software with Bluetooth or USB transfer to the printer. Optional 7-inch touchscreen available. | |
| Air supply | No need air supply | |

Dimension

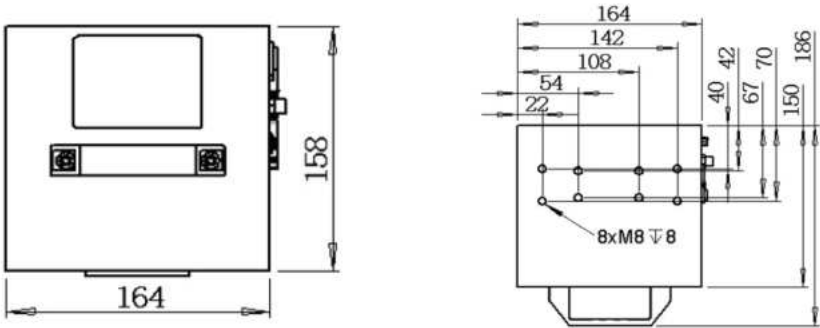

Controller size

Optional

